

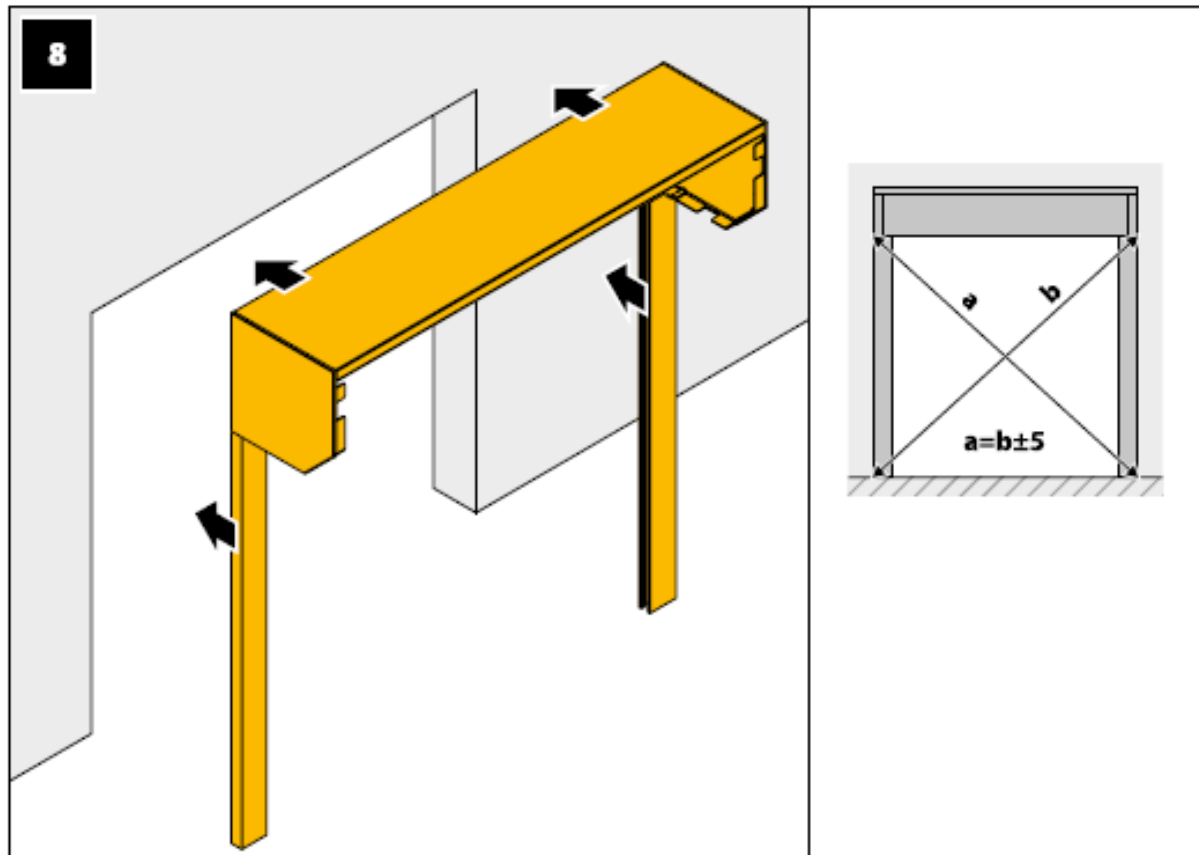


Fig. 5 – New GR105x35IE guider rail and SP/77WP side lock

Talius will provide UHMW blocking for between the two steel mount flanges of the CCM Steel Bracket. During installation a flat head fastener should be used to fasten through this UHMW blocking to ensure it remains in place for the life of the unit.

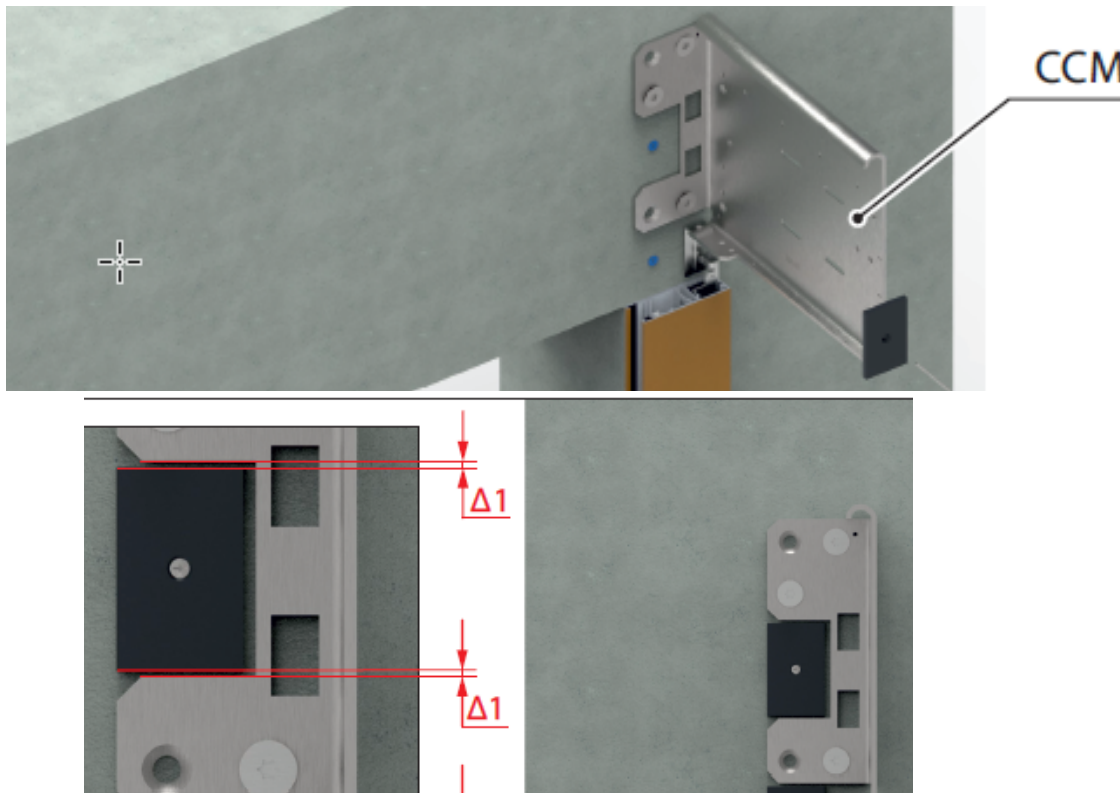

The steel brackets are designed to be fastened using a flat head bolt similar to that pictured below. Beware that using a fastener where the head protrudes above the surface of the steel bracket may result in the curtain catching on the head of the bolt during operation.



ASSY® VG CSK

The ASSY® VG Countersunk head (CSK) screw is the multipurpose fully threaded screw, suitable for use in wood-to-wood, steel-to-wood, concrete-to-wood, and reinforcing applications. All fully threaded screws are suitable for timber reinforcements. With the long threaded shank, high withdrawal capacities can be achieved. The drill tip allows for more effective penetration and reduced spacing. Closer end- and edge-distances are possible, which can reduce the required sizes of the timber members. The VG CSK screw is also suitable for use with the 90° cup and 45° wedge washer.

Countersunk Head

Drill bit tip


Self-tapping








Fully Threaded



Diameters: 5/16", 3/8", 1/2"




Wood/Wood, Wood/Steel,
Wood/Concrete


Code Approved: ICC, CCMC
& LARR

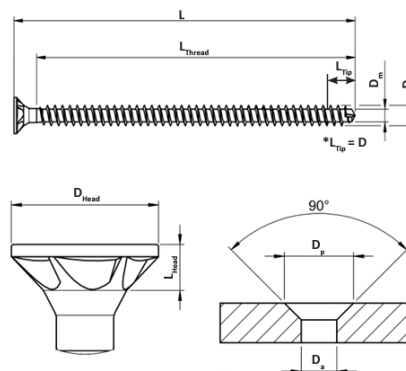

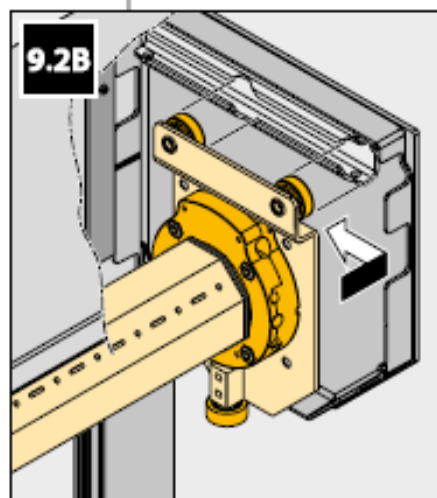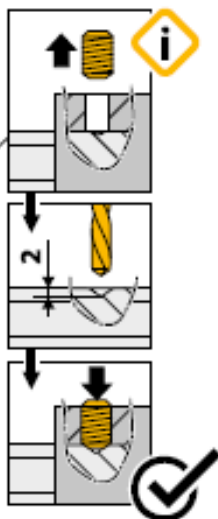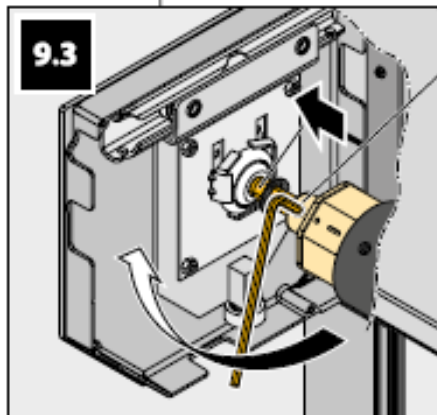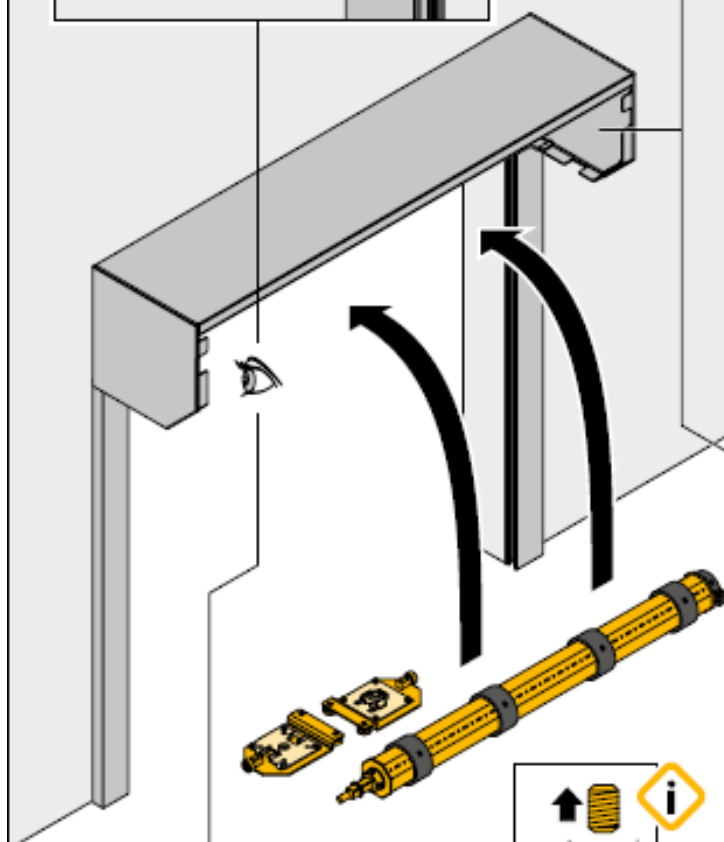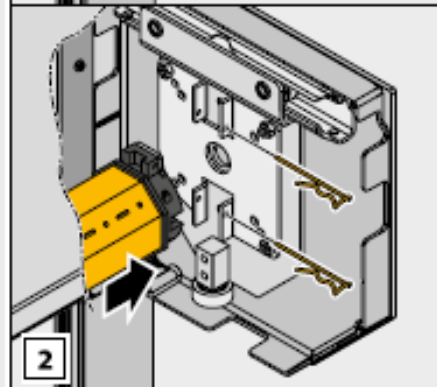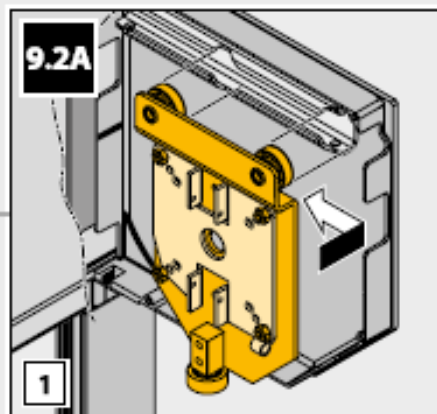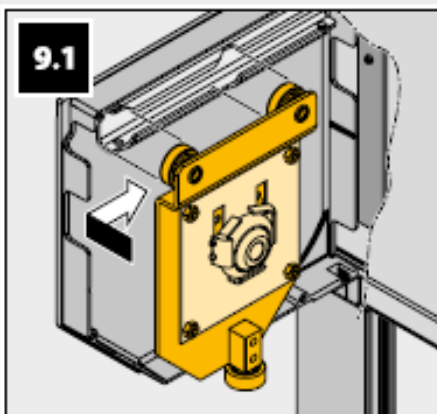

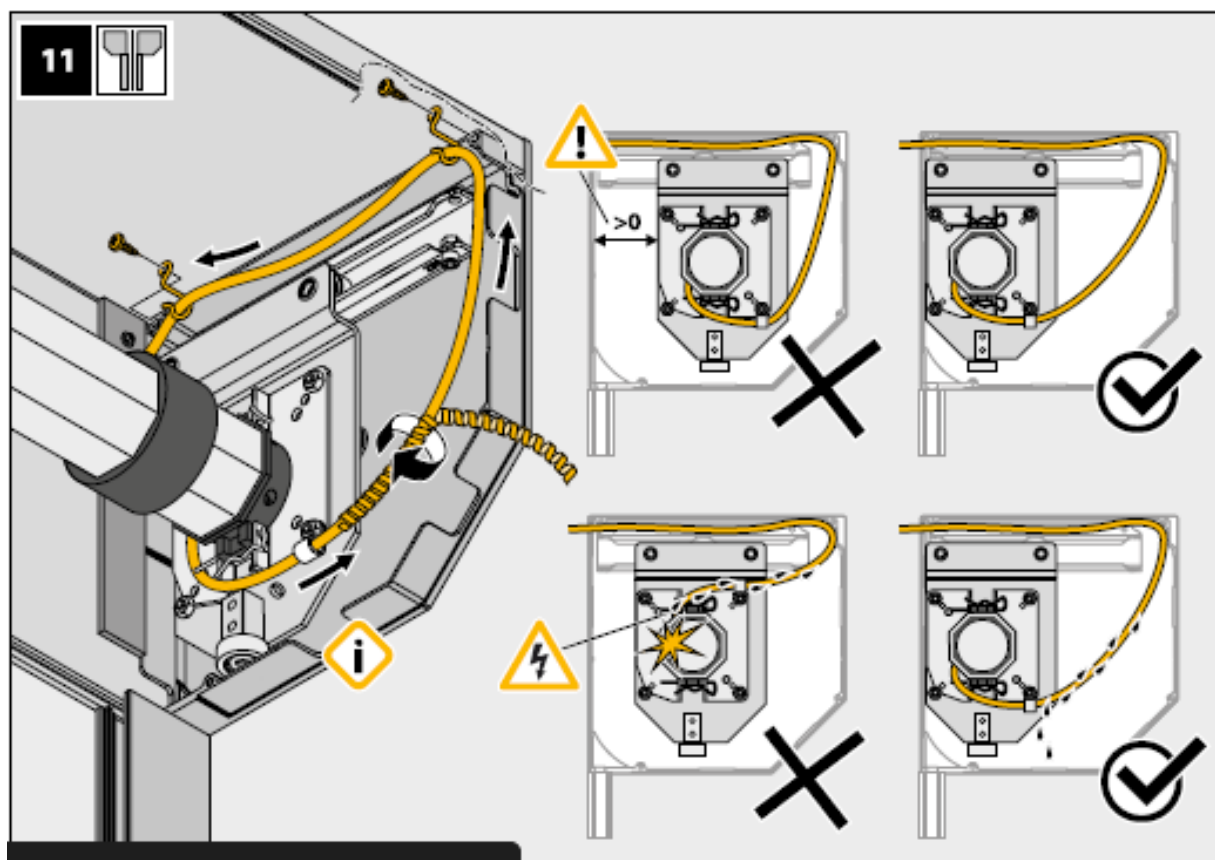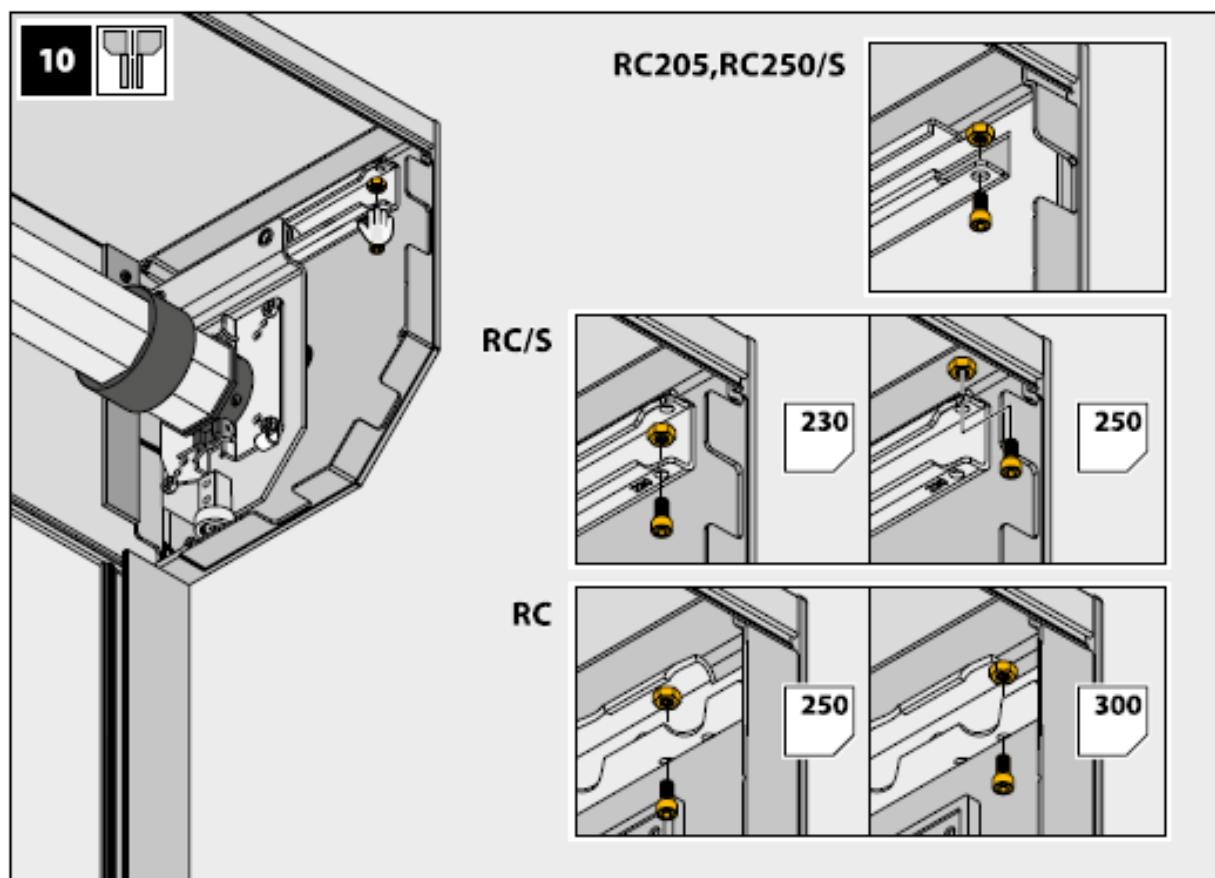

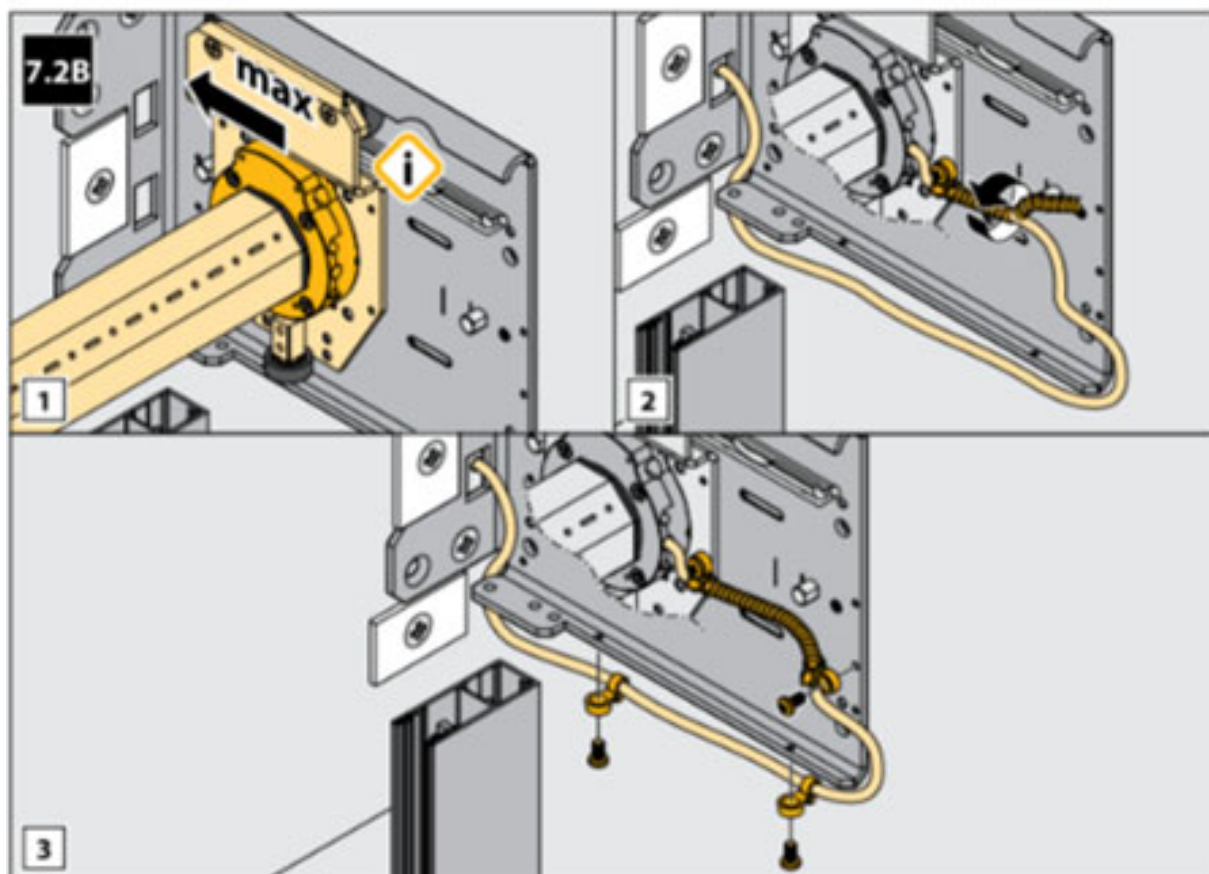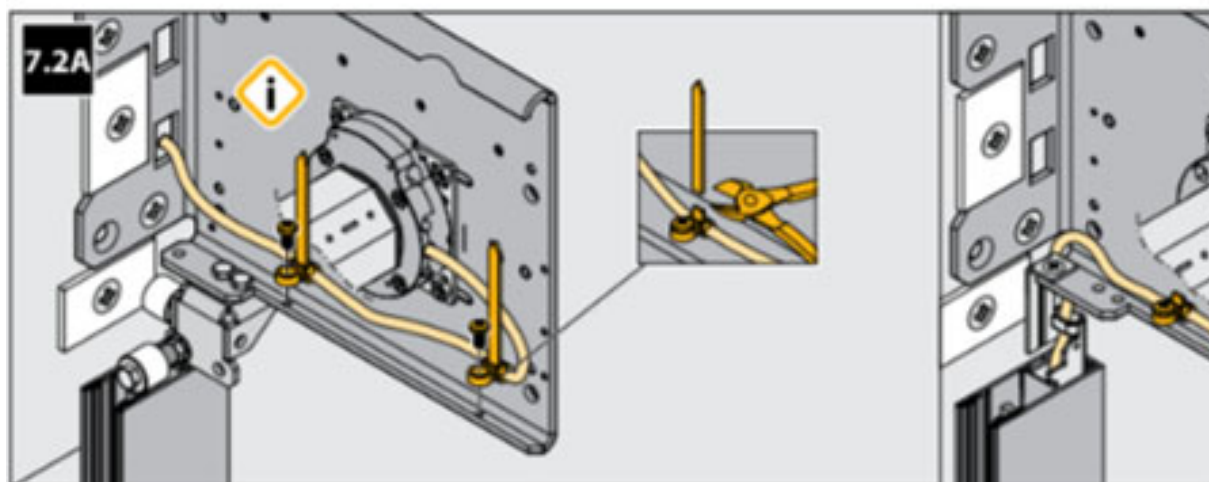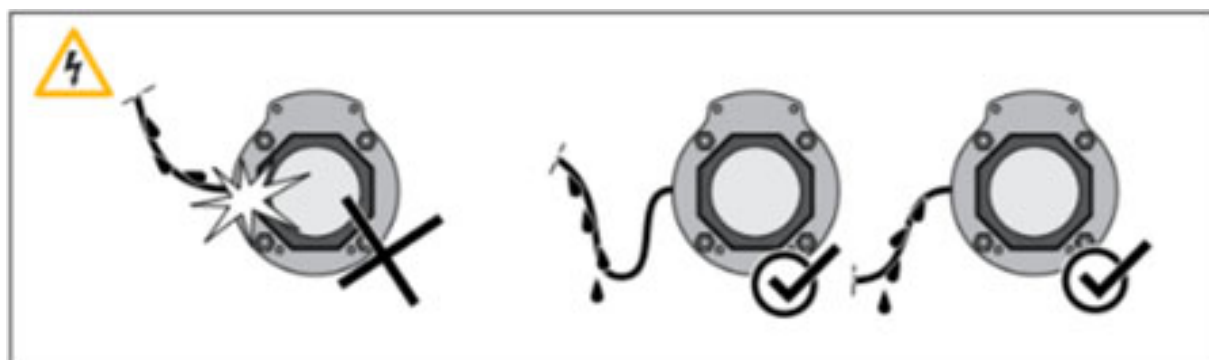

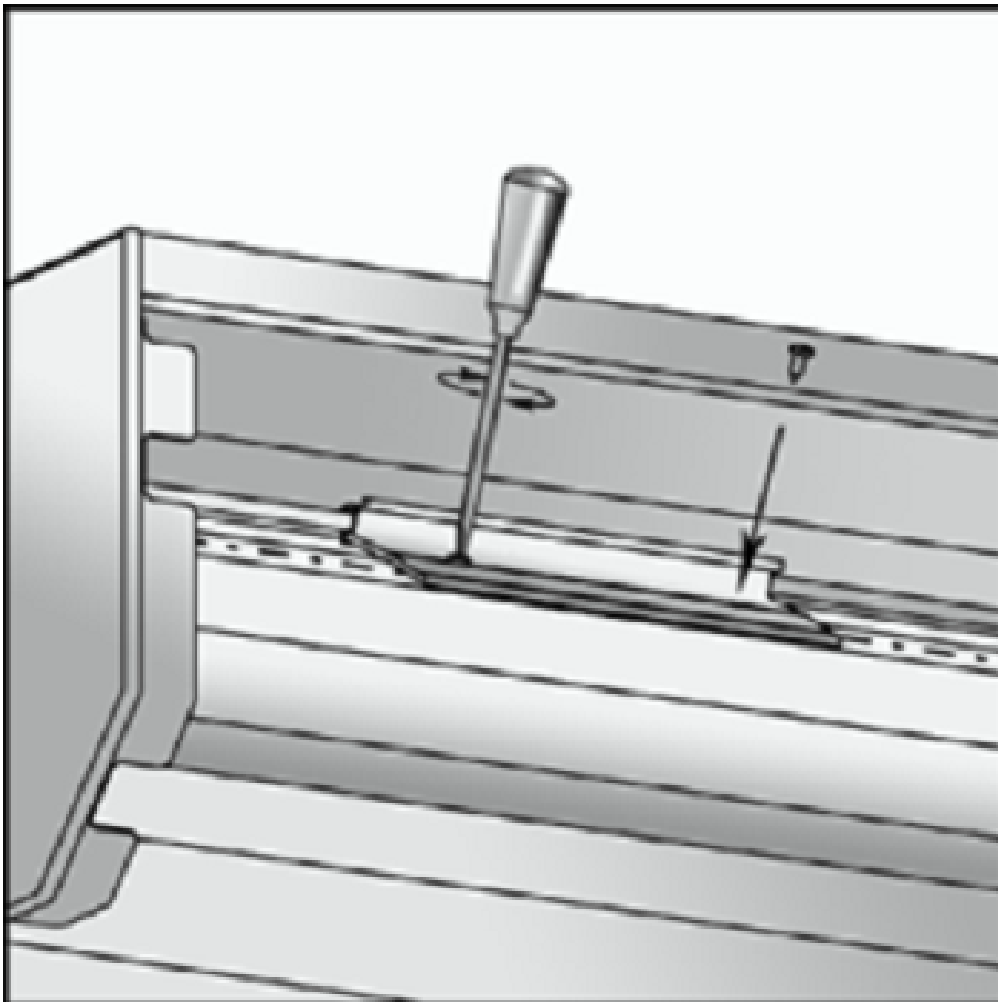

If Retainer Profiles are supplied for attaching the curtain to the roller tube, use either screws or rivets, ensuring that the fastener does not interfere with the motor inside the rollertube.